

# COIL TUBING UNIT



## .|l PERFORM.

### Improved Injector

- 120K of intermittent pulling at max speed of 80 ft/min
- Injector head pulls 50,000 lbs at 200 ft/min when in speed
- Optimized core and tubing guide extends tube life span

**100K**

Continuous Pulling

**120K**

Intermittent Pulling

**80ft/min**

Maximum Speed

**50K**

Continuous Snubbing

### Extra Wide Reel

- 166" diameter x 96" core x 117" flange
- 117" flange diameter holds 24,000 ft of 2-3/8" tubing
- Robust level wind assembly handles large tubing loads
- Reel adjusts for different tubing size without changing the reel
- Reel shafts handle gear driven loads without flexing

**Length:** 66"

**Height:** 100"

**Width:** 51"


**Weight:** 14,505 lbs

***Propell***

# COIL TUBING UNIT

## Tough Trailer

- Road legal width & overbuilt to resist maximum payload with minimal strain
- Dual fifth wheel hook-up with jeep and stinger supports oversized reels
- Customizable modular cabin features ultra-lightweight options & cold/hot weather packages
- Optional removable cabin with robust skid frame
- Additional hydraulic cooling on dual pump system

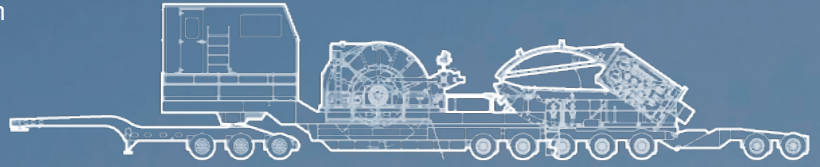

**Length:** 1200"    **Height:** 162"  
**Width:** 143"    **Weight:** 124,000 lbs

## PROTECT.

- Safety features such as added climbing supports and railed walkways throughout
- Guards over chain drives and rotating groups
- Platforms made from high-grip Fibergrate

## PROPELL.

Every Propell coil tubing unit is customized to perfectly suit the application it is intended for, the environment it must work in, and the business strategy of our customers. We ensure the quality and longevity of Propell products through continued partnerships with our customers and ongoing after-sales support from our dedicated Customer Care team.



Propell is a North American leader with 3 facilities and equipment in operation across the U.S. and Canada. Propell supports leading well service companies in North America with new equipment technology, equipment renewal, product training, and after sales support.

[www.propellamerica.com](http://www.propellamerica.com) | 1.817.573.3550

