


# TRIPLEX 600HP PUMP

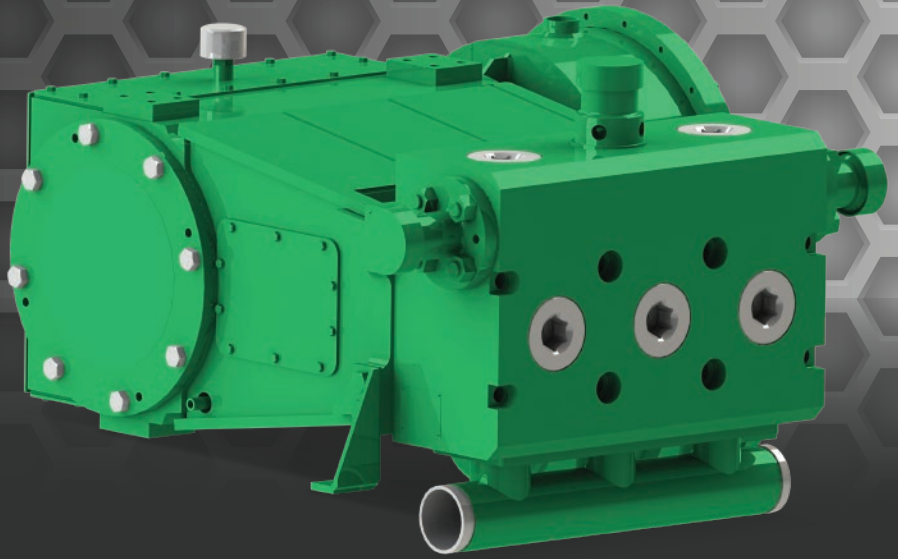

**600**

MAX BRAKE  
HORSEPOWER

**100K**

MAX BRAKE  
ROD LOAD

**6in**

STROKE  
LENGTH

**4:61:1**

GEAR  
RATIO

## SPECIFICATIONS

- Utilizes robust 1000 HP gearbox
- Gear box features AGMA Class 10 carburized, hardened and ground gearing
- Compact size allows “back-to-back” mounting within legal width
- Centered crankshaft for improved dynamic balanced mounting

## FLUID END OPTIONS

- Horizontal Triplex Monoblock design
- Proprietary forged steel or optional stainless steel
- Sized to fit industry standard power ends
- Durable plunger coating for increased lifespan
- Discharge gauge ports
- Multiple suction manifolds available
- **Contact for rebuild options and individual parts**

**50.25in**  
LENGTH

**52.94in**  
WIDTH

**23.88in**  
HEIGHT

**4950lbs**  
WEIGHT

## REQUEST A QUOTE

1.817.573.3550 | sales@propell.com




**Propell**

# PERFORMANCE DATA

For applications above 15,000 psi, please contact us  
Other plunger sizes available

PLUNGER DIAMETER	OUTPUT PER REV	CRANKSHAFT RPM/PINION RPM									
		50/230		120/552		200/922		300/1383		450/2075	
in	gal/rev	gpm	psi	gpm	psi	gpm	psi	gpm	psi	gpm	psi
2.75	0.46	23	16991	55	16828	92	10060	138	6707	207	4471
3	0.55	28	13957	66	14024	110	8414	165	5609	248	3732
3.5	0.75	38	10284	90	10284	150	6170	225	4114	338	2738
4	0.98	49	7975	118	7844	196	4722	294	3148	441	2099
4.5	1.24	62	6303	149	6212	248	3732	372	2488	558	1659
<b>OUTPUT POWER (HHP)</b>		228		540		540		540		540	


## HYDRAULIC HP CURVE

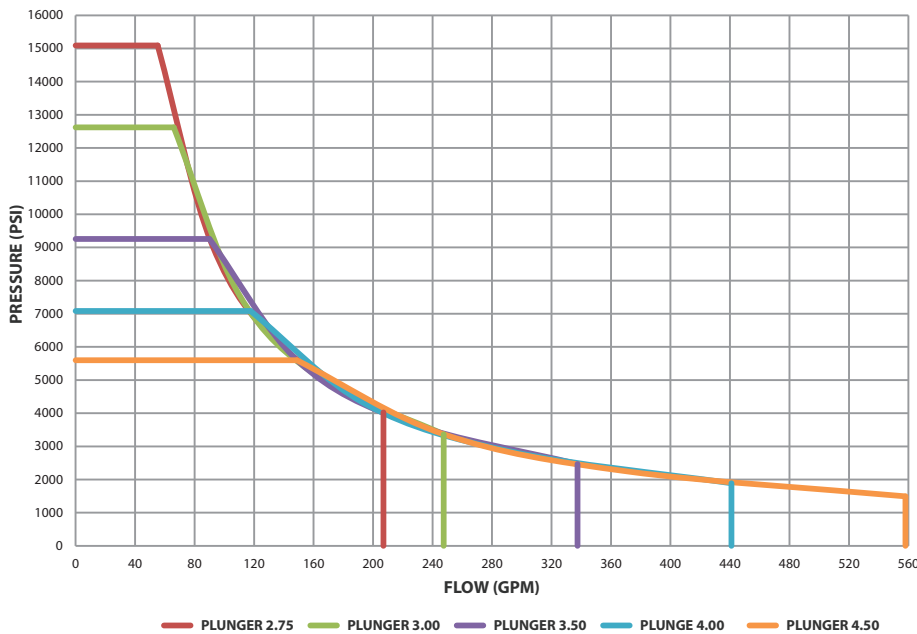

Offering a compact footprint with an efficiently designed center-to-frame crankshaft, the T600 is an ideal choice for a rugged well service pump that boasts an increased service life. The T600 is proven, reliable choice for a number of applications including acidizing, cementing, coil tubing support, and snubbing operations.

## PUMP REBUILD PROGRAM

Propell offers a complete rebuild and swing program. Featuring 2250 HP and 2500 HP pumps in stock and ready for exchange. Simply bring us your used pump and exchange it for a rebuilt swing pump.

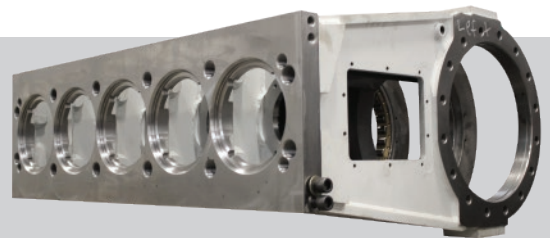

PERFORM. PROTECT. PROPELL.

[www.propell.com](http://www.propell.com)

